


Volume:
316 Gals / Vert Ft

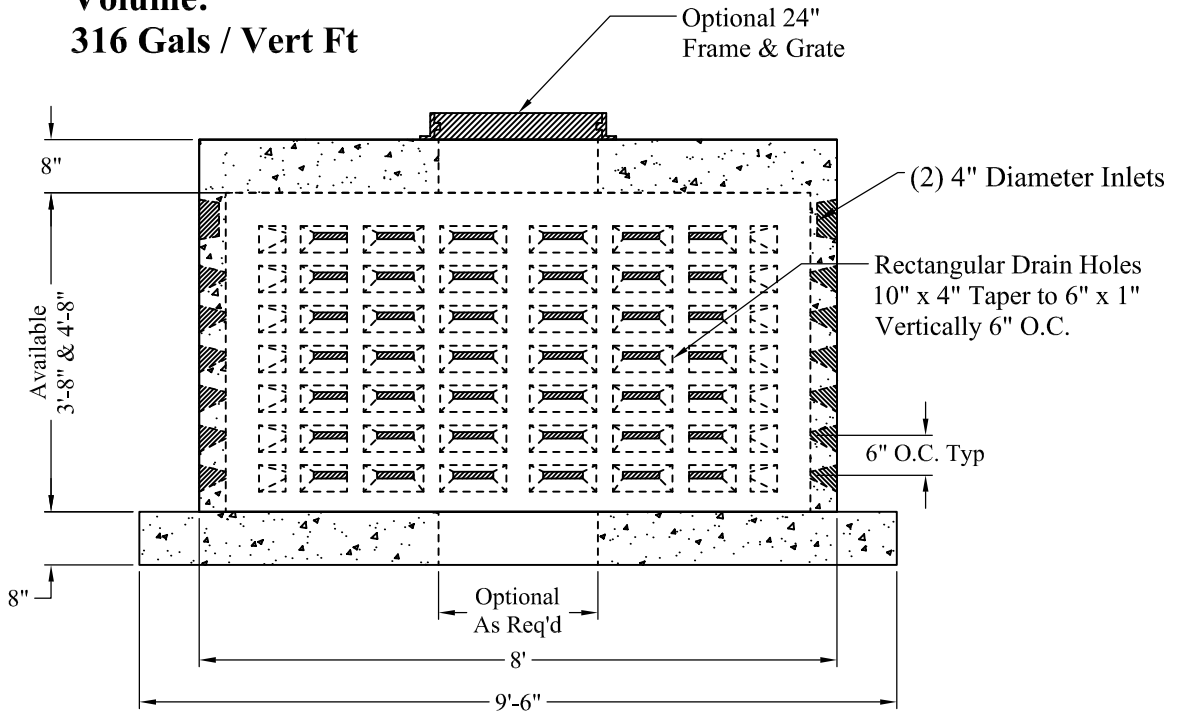

Est Weights:

3'-8":	7,150 Lbs
4'-8":	7,900 Lbs
Base Slab:	7,000 Lbs

General Notes

- 1.) Steel Reinforcement Conforms To Latest ASTM Specifications:
ASTM A-615 Grade 60 Rebar
ASTM A-185 Welded Wire Fabric
- 2.) Concrete: $f_c = 4,000$ psi @ 28 Days Minimum
- 3.) Design Loading: AASHTO-HS20-44
- 4.) Optional Cast Iron Covers or Concrete Covers Available
- 5.) Hole Coring Available for Larger Diameter Pipes
- 6.) All Sections are Butt Joint
- 7.) Solid Base or with an Opening

**Phoenix
Precast
Products**

**Shallow
8' O.D. Dry Well
With Base Slab**