



1-800-639-2199

Fax (603) 224-2927

Tanks\Standard\1500 Gal\1500 Gal HD Septic Tank

Standard Cover Configuration
Is (2) 24" Dia Concrete Covers

Optional Cover Configuration
Is (2) 24" Dia Plastic Risers
Cast In, With Plastic Covers

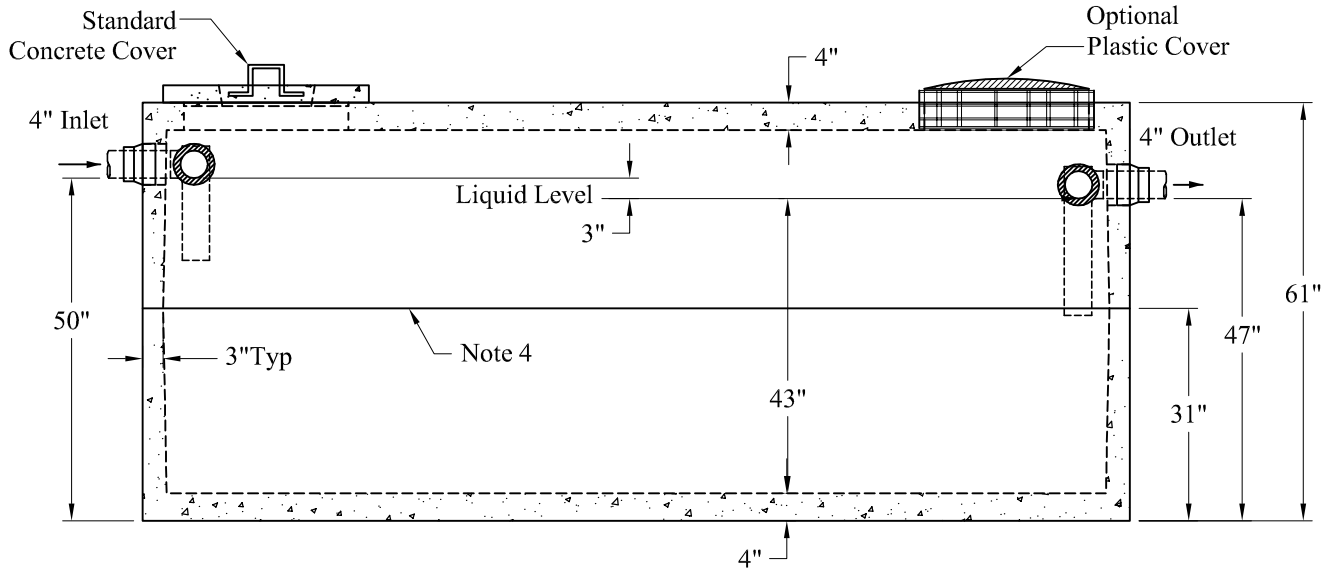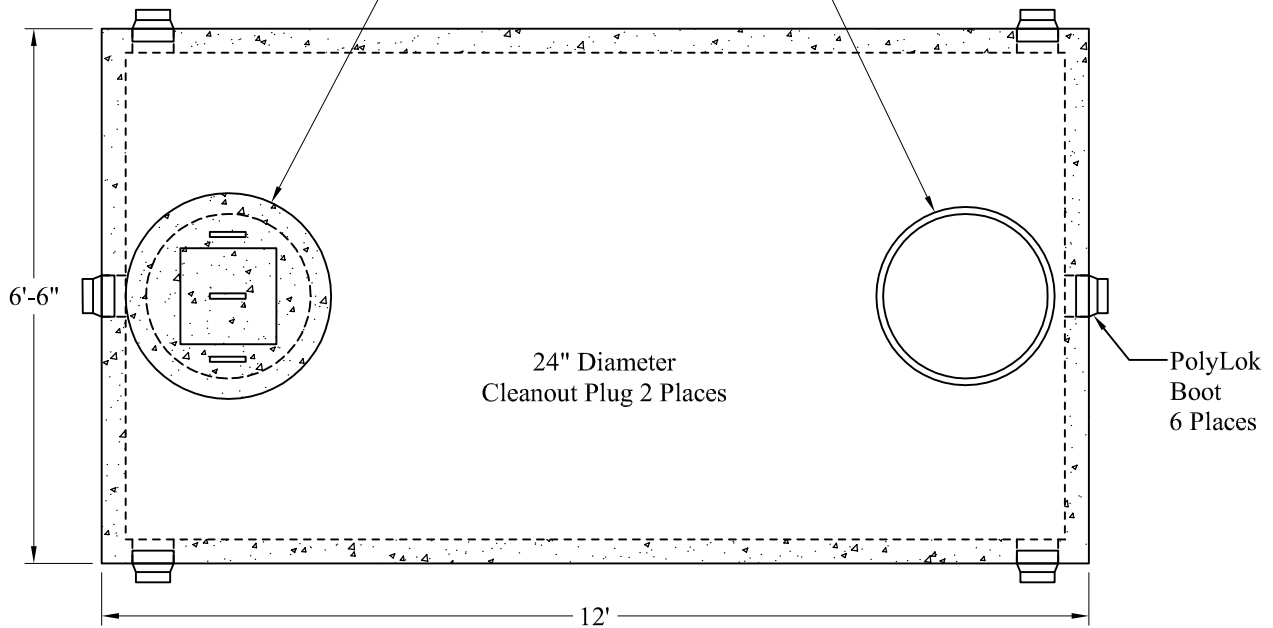

Liquid Level: $6' \times 11.5' = 517 \text{ Gals/VF} \times 3.58' = 1,850 \text{ Gals}$

General Notes

1. Steel Reinforcement Conforms to Latest ASTM Specifications: ASTM-A615 Grade 60 Rebar
 2. Concrete: fc = 4,000 psi @ 28 Days Minimum
 3. Flexible Sleeves Used On All Pipe Openings
 4. Butyl Rubber Joint Sealant Provided
 5. Internal PVC Baffles Available
- Inlet: Shall Penetrate at Least 9" Below the Liquid Level, But Not Deeper Than the Outlet Baffle.
- Outlet: Shall Extend Below the Surface of the Liquid Equal to 40% of the Liquid Depth (17").
6. HD Tanks: 3' - 6' Cover Max, Non-Traffic

Est Weight:

Upper: 6,850 Lbs
Lower: 7,300 Lbs
Total: 14,150Lbs

Phoenix
Precast
Products

1,500 Gallon
HD Septic Tank

P/N: ST-1500RHD

Phoenix Precast Products

Phoenix Precast Products