


Plan View

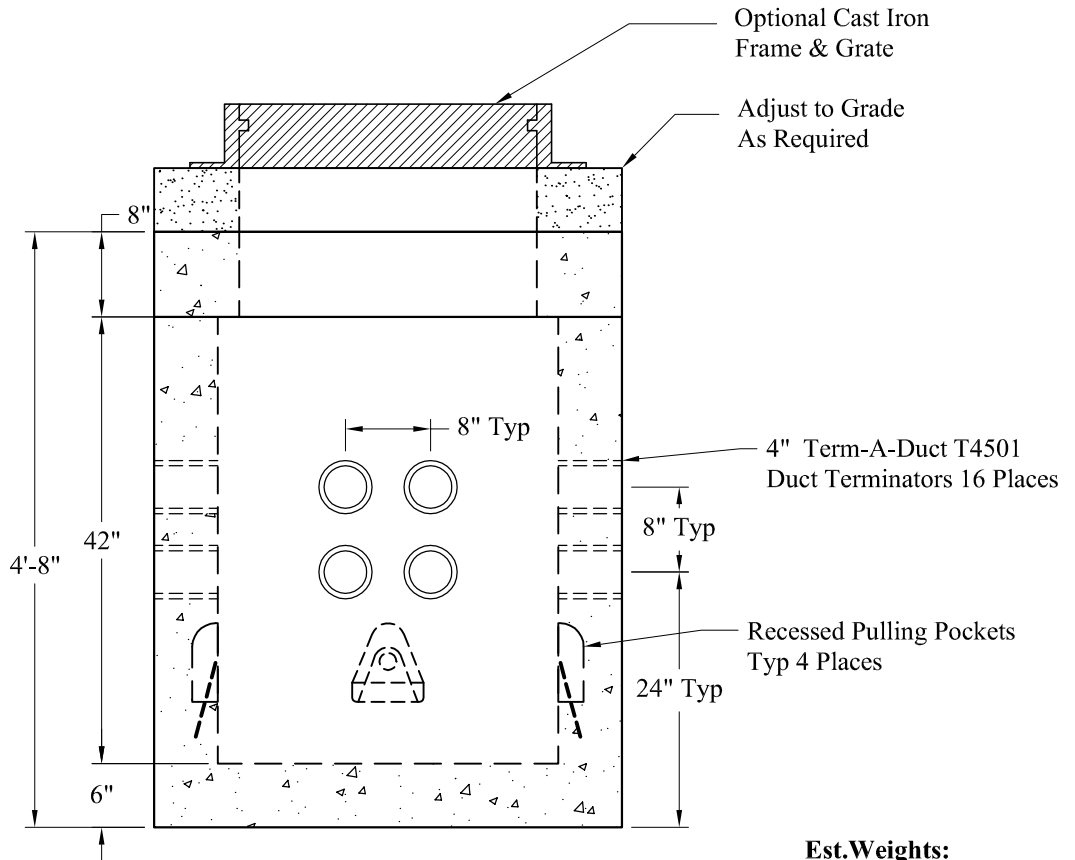

Optional Cast Iron Frame & Grate

Adjust to Grade As Required

4" Term-A-Duct T4501 Duct Terminators 16 Places

Recessed Pulling Pockets Typ 4 Places

**Est. Weights:**

|               |                  |
|---------------|------------------|
| Top Slab:     | 1,025 Lbs        |
| Base:         | 4,360 Lbs        |
| <b>Total:</b> | <b>5,385 Lbs</b> |

Side View

**General Notes**

1. Concrete:  $f_c = 5,000$  psi @ 28 Days Minimum
2. Reinforcing Steel: ASTM-A615 Grade #60 Black Deformed Bars
3. Design Load per ASTM C857-13 Standard Practice for Minimum Structural Design Loading for Underground Precast Utility Structures
4. Specification per ASTM C858-10 Standard Specification for Underground Precast Concrete Utility Structures
5. Duct Terminators: 4.50" ID Bowco Model T-4501

Phoenix  
Precast  
Products

FAA Pull Box  
With Floor

P/N: