

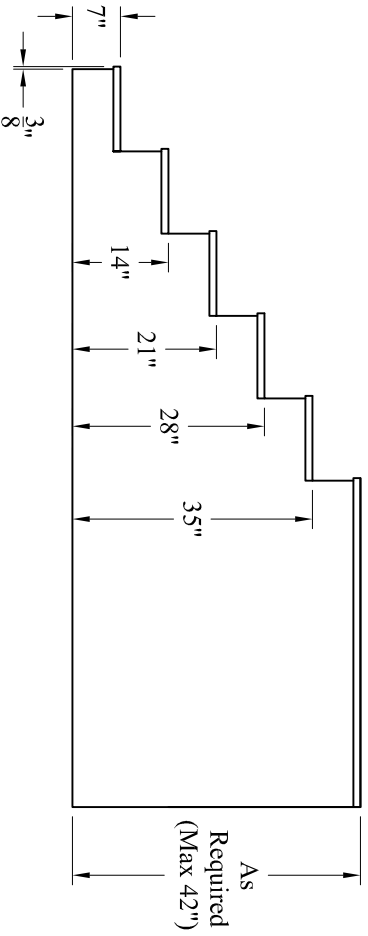


Phoenix Precast Products

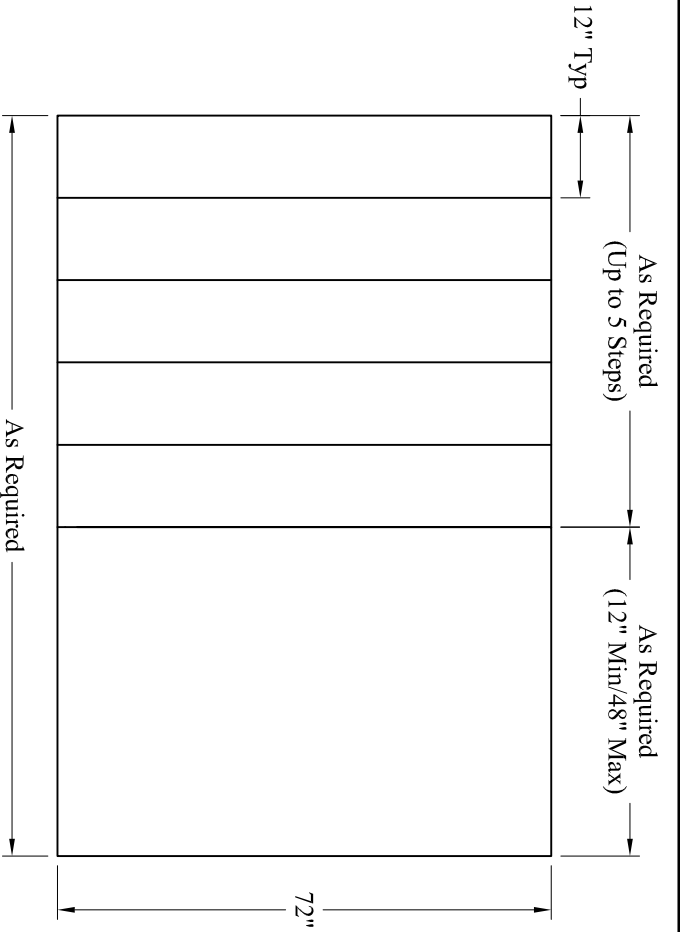

- GENERAL NOTES**
- 1.) Concrete fc = 4,000 psi After 28 Days Minimum
  - 2.) Broom Finish Supplied
  - 3.) Blocks and Angles Attached to Poured Foundation by Phoenix Precast
  - 4.) Optional Concrete Slab, Sono Tubes or Compacted Crushed Gravel by Others
  - 5.) Step Rise: 7"
  - 6.) Tread Depth: 12"

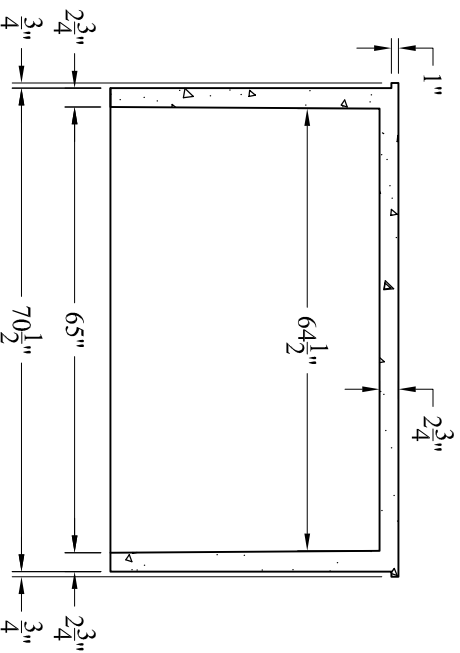

Phoenix Precast Products

Date	12/19/13	Drawn By:	EWS
Rev:	0	App'd:	

Phoenix  
Precast  
Products

6' Wide Stair  
Custom Platform

77 Regional Drive

Concord, NH 03301