
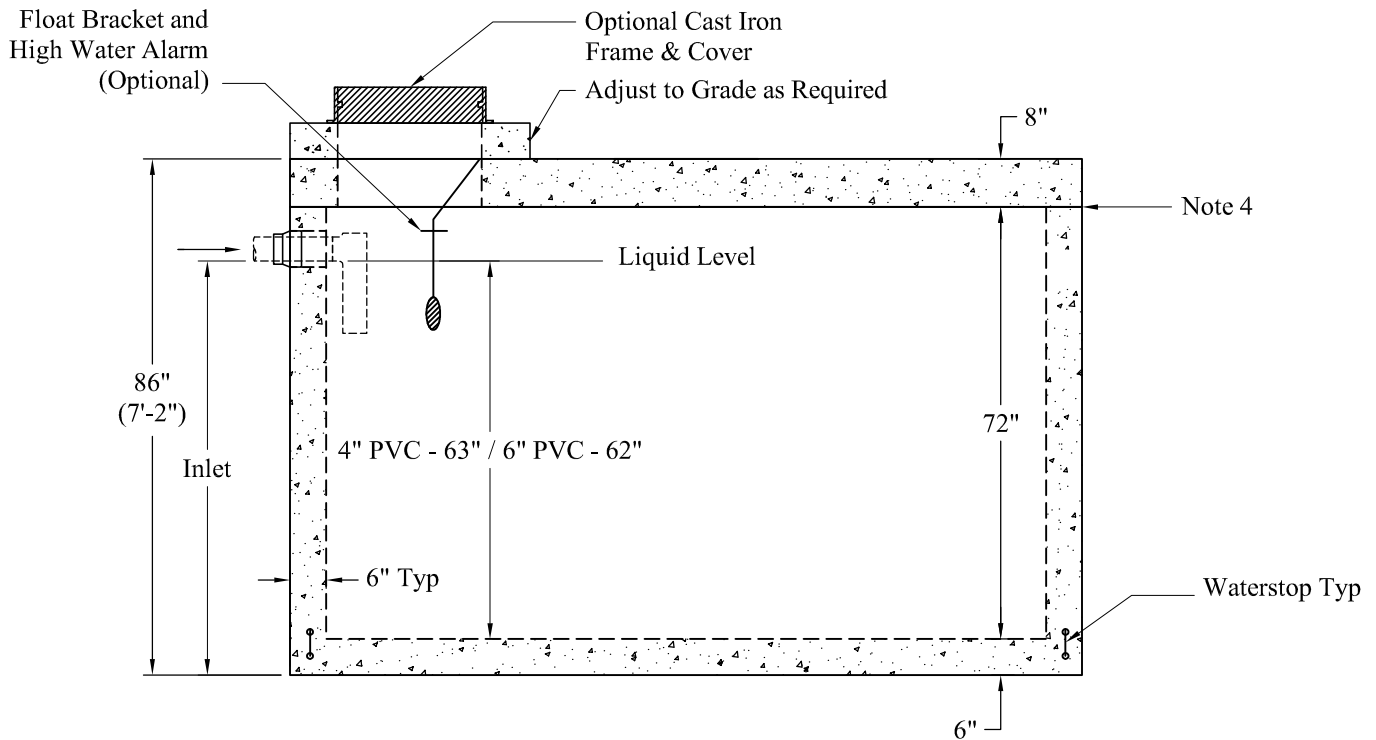


1-800-639-2199

Fax (603) 224-2927

Tanks/Standard/2000_Gal_H2O/2000 Gallon H2O Holding Tank Sales

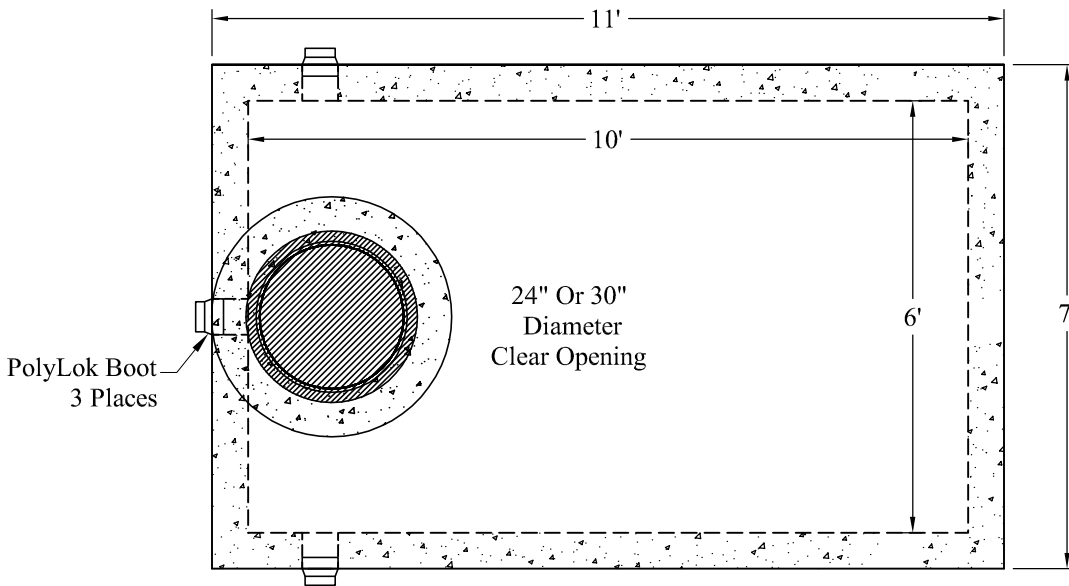

Liquid Levels: 6' x 10' = 450 Gals/VF
 4" PVC = 2,250 Gals Inverts: Inlet-69"
 6" PVC = 2,214 Gals Inverts: Inlet-68"

General Notes:

1. Steel Reinforcement Conforms to Latest ASTM Specifications: ASTM-A615 Grade 60 Rebar
2. Concrete: $f_c = 5,000$ psi @ 28 Days Minimum
3. Flexible Sleeves Provided On All Pipe Connections
4. Butyl Rubber Joint Sealant Provided
5. Internal PVC Baffles Available Upon Request
6. Design Loading: AASHTO-HS20-44, ASTM C-890-06
7. Design Specified As: ASTM C-1227-08, ASTM C-913-08
8. Other Inlet/Outlet Pipe Sizes Available
9. Alarms, Float Levels, and all Ancillary Equipment Are Optional

Est Weights:

Top Slab -	7,100 Lbs
Base -	20,800 Lbs
Total:	27,900 Lbs

Phoenix
Precast
Products

2000 Gallon H-20
Holding Tank

P/N: HT-2000H20