


Detail of Openings (NTS)

Volume:
316 Gals / Vert Ft

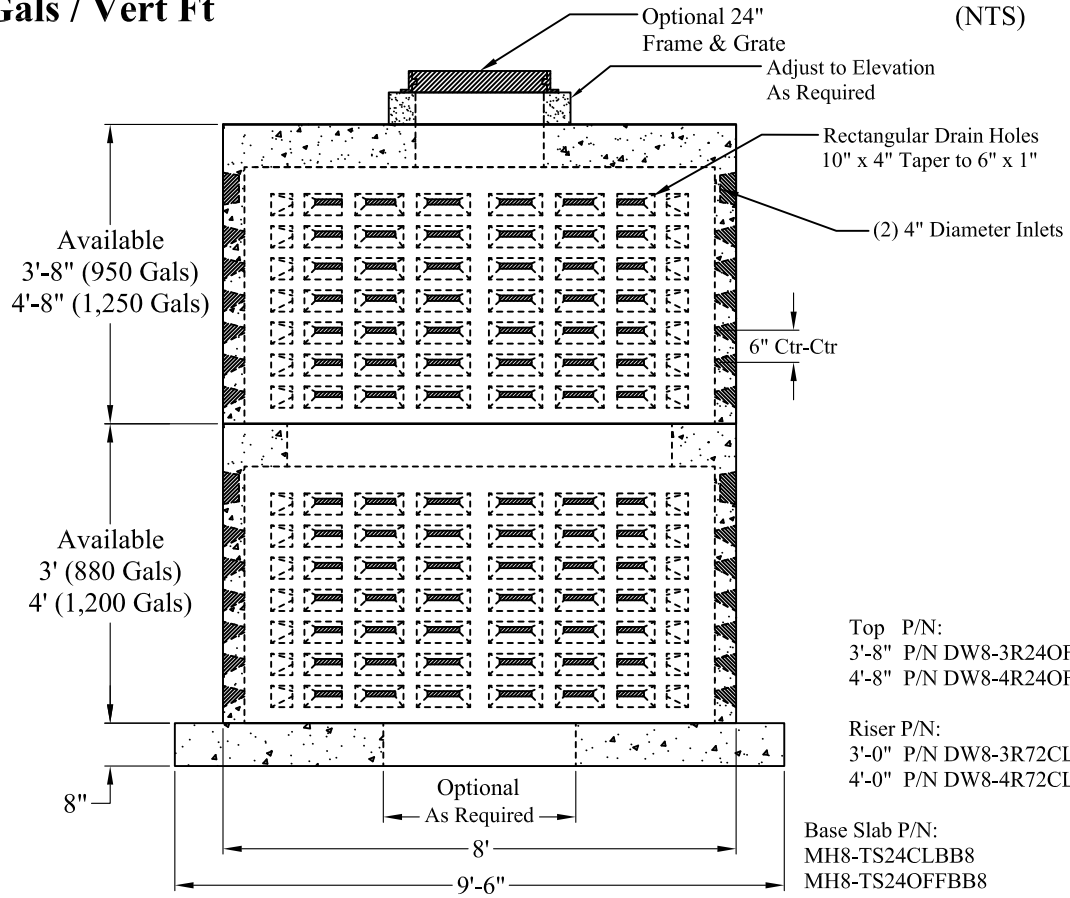

Top P/N:	Est Weights
3'-8" P/N DW8-3R24OFF	7,150 Lbs
4'-8" P/N DW8-4R24OFF	7,900 Lbs
Riser P/N:	
3'-0" P/N DW8-3R72CL	4,100 Lbs
4'-0" P/N DW8-4R72CL	4,850 Lbs

Base Slab P/N:	
MH8-TS24CLBB8	6,690 Lbs
MH8-TS24OFFBB8	6,690 Lbs
MH8-TS30CLBB8	6,515 Lbs
MH8-TS30OFFBB8	6,515 Lbs
DW8-BASESLAB4	3,500 Lbs
DW8-BASESLAB6	5,250 Lbs
DW8-BASESLAB8	7,000 Lbs

General Notes

- 1.) Steel Reinforcement Conforms To Latest ASTM Specifications:
ASTM A-615 Grade 60 Rebar
ASTM A-185 Welded Wire Fabric
- 2.) Concrete: $f_c = 4,000$ psi @ 28 Days Minimum
- 3.) Design Loading: AASHTO-HS20-44
- 4.) Optional Cast Iron Covers or Concrete Covers Available
- 5.) Hole Coring Available for Larger Diameter Pipes
- 6.) All Sections Are Butt Joint
- 7.) Solid Base or With An Opening As Required

**Phoenix
Precast
Products**

**Deep
8' O.D. Dry Well
With Base Slab**