


**Volume:**  
**316 Gals / Vert Ft**

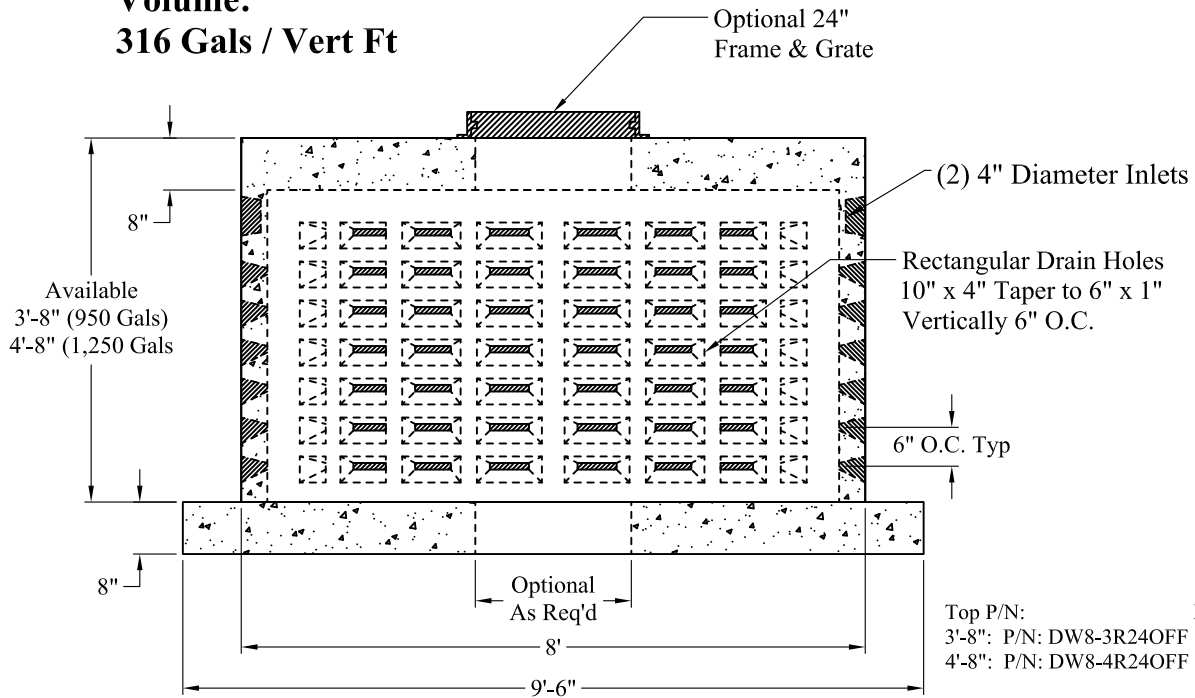

Top P/N:	Est Weights
3'-8": P/N: DW8-3R24OFF	7,150 Lbs
4'-8": P/N: DW8-4R24OFF	7,900 Lbs

Base Slab P/N:	
MH8-TS24CLBB8	6,690 Lbs
MH8-TS24OFFBB8	6,690 Lbs
MH8-TS30CLBB8	6,516 Lbs
MH8-TS30OFFBB8	6,515 Lbs
DW8-BASESLAB4	3,500 Lbs
DW8-BASESLAB6	5,250 Lbs
DW8-BASESLAB8	7,000 Lbs

**General Notes**

- 1.) Steel Reinforcement Conforms To Latest ASTM Specifications:  
ASTM A-615 Grade 60 Rebar  
ASTM A-185 Welded Wire Fabric
- 2.) Concrete:  $f_c = 4,000$  psi @ 28 Days Minimum
- 3.) Design Loading: AASHTO-HS20-44
- 4.) Optional Cast Iron Covers or Concrete Covers Available
- 5.) Hole Coring Available for Larger Diameter Pipes
- 6.) All Sections are Butt Joint
- 7.) Solid Base or with an Opening

**Phoenix  
Precast  
Products**

**Shallow  
8' O.D. Dry Well  
With Base Slab**