1-800-639-2199 Fax (603) 224-2927

Pump Stations\Standard\4Ft Dia\300 Gallon LD PC XB

Phoenix Precast Products

Pumps and Related Accessories are Optional.
Junction Box and Electrical Connections
Installed by Others

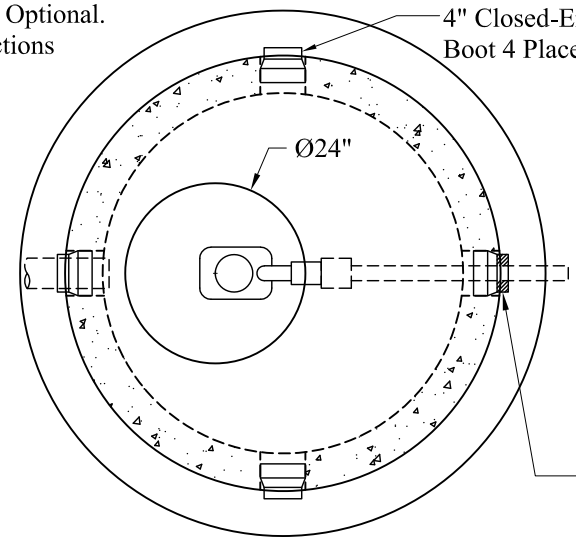

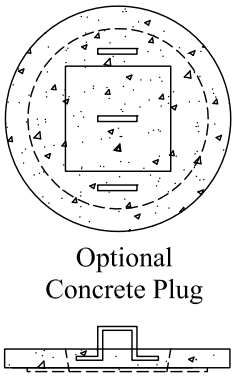

NOTE: A Pipe Bushing
Will be Required on all
Boots with Pipes Less Than 4"

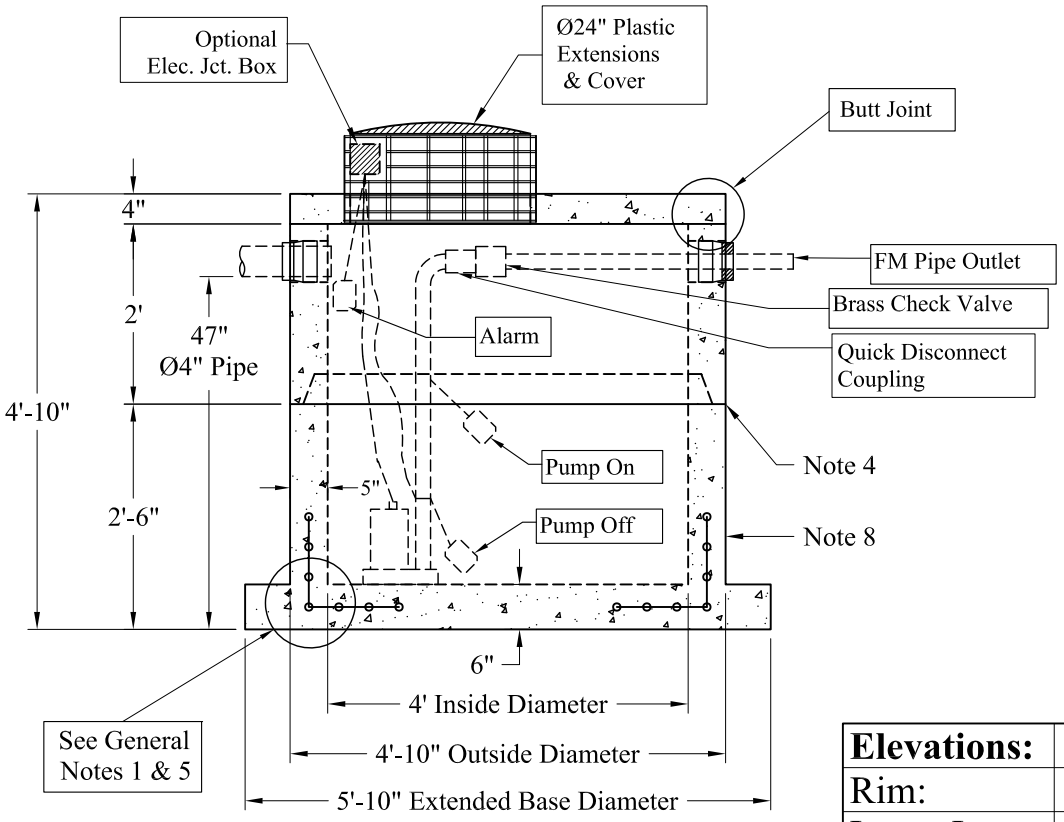

Elevations:	
Rim:	
Invert In:	
Alarm On:	
Pump On:	
Pump Off:	
Inside Floor:	

General Notes

1.) Reinforcement Steel Conforms To Latest ASTM A 185 Specifications: 0.12 Sq. In. / Lineal Ft. And 0.12 Sq./In. (Both Ways) Base Bottom
2.) Concrete: fc = 4,000 psi @ 28 Days Minimum
3.) Manhole Design:
Conforms To The Latest ASTM C478 Specifications For "Precast Reinforced Concrete Manhole Sections".
4.) Butyl Rubber Joint Sealant Provided
5.) One Pour Monolithic Base Section
6.) Liquid Capacity: 94 Gallons/VF (8 Gallons/Inch)
7.) Flexible Boots Provided
8.) Exterior Coating Available

Est. Weight:

Top Slab:	850 Lbs
2' Riser:	1,760 Lbs
2'-6" Base:	3,880 Lbs
Total:	6,490 Lbs

Phoenix Precast Products	4' Diameter LD 300 Gallon Pump Chamber Ext Base
P/N: PC-300LDXB	

Phoenix Precast Products

77 Regional Drive Concord, NH 03301