
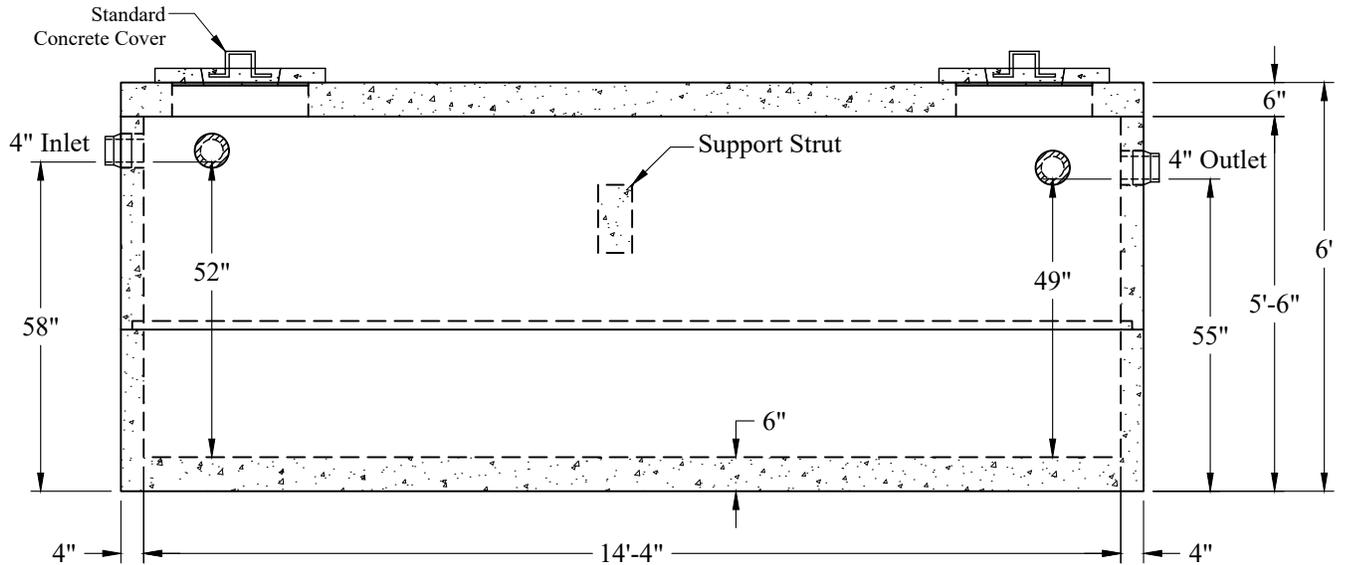


**Liquid Level:**

7.33' x 14.33' = 787.8 Gals/VF

@4.08' = 3,214 Gallons

4" PVC Inverts: Inlet: 58"  
Outlet: 55"

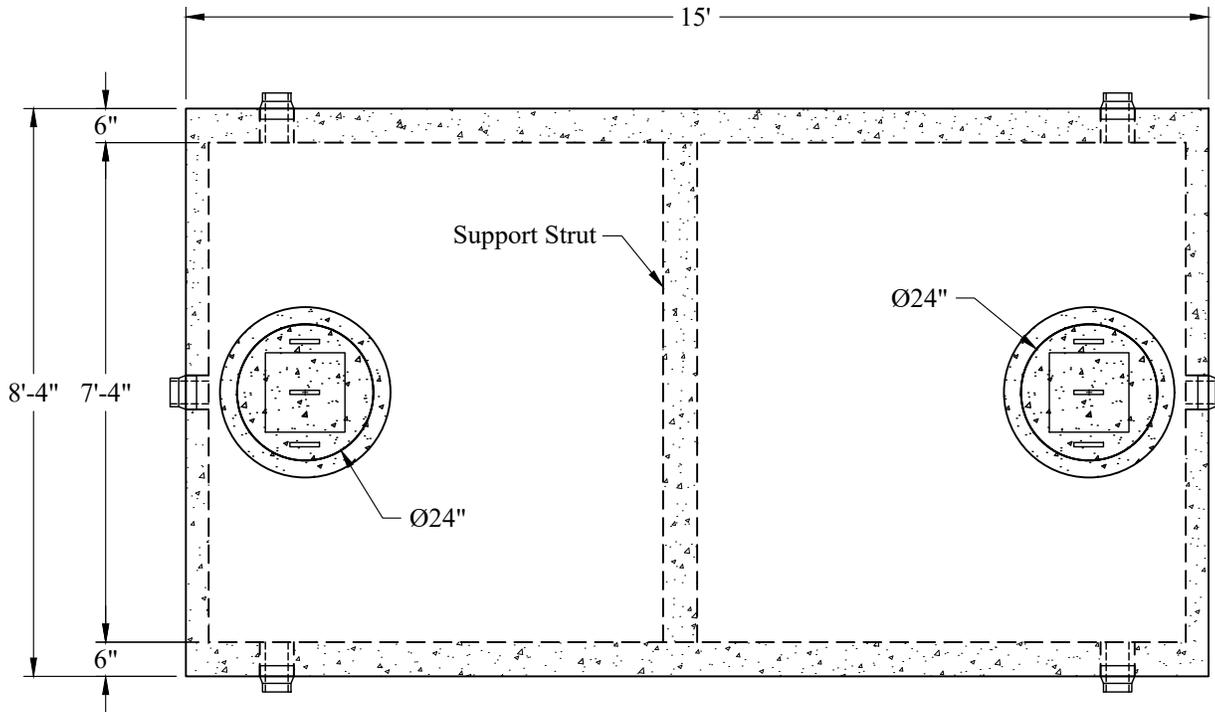

**General Notes**

1. Concrete:  $f_c = 5,000$  psi @ 28 Days Minimum
2. Steel Reinforcement Conforms to Latest ASTM Specifications: ASTM-A615 Grade 60 Rebar
3. Flexible Sleeves Used On All Pipe Openings
4. Butyl Rubber Joint Sealant Provided
5. Internal PVC Baffles Available
- Inlet: Shall Penetrate at Least 9" Below the Liquid Level, But Not Deeper Than the Outlet Baffle.
- Outlet: Shall Extend Below the Surface of the Liquid Equal to 40% of the Liquid Depth (20").
6. HD Tanks: 3' - 6' Cover Max, Non-Traffic

Est. Weights:

Top Slab:	8,800 Lbs
3' Riser:	9,400 Lbs
Base:	15,100 Lbs
<b>Total:</b>	<b>33,300 Lbs</b>

Phoenix  
Precast  
Products

3,000 Gallon  
HD Septic Tank

P/N: ST-3000RHD

Concord, NH 03301

77 Regional Drive

Phoenix Precast Products

Phoenix Precast Products