
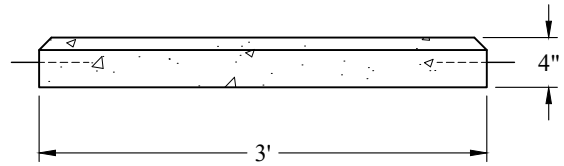



Broom Finish

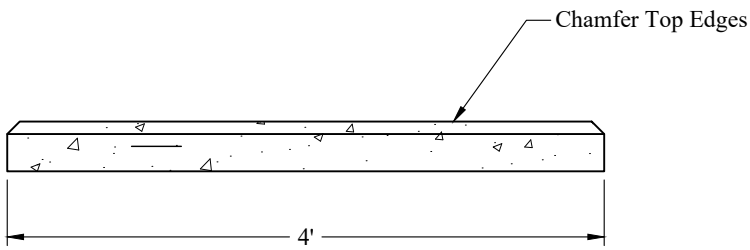

Est Weight: 600 Lbs

General Notes

1. Concrete: $f_c = 5,000$ psi @ 28 Days Minimum
2. Steel Reinforcement Conforms to Latest ASTM Specification:
ASTM A-615, Grade 60 Black Deformed Bars

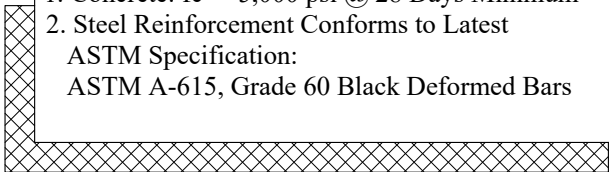

Phoenix
Precast
Products

3' x 4' x 4"
Air Conditioner Pad

P/N: AC-PAD