



General Notes

1. Concrete: $f_c = 5,000$ psi @ 28 Days Minimum
2. Reinforcement Conforms to ASTM A 615-Grade 60
3. Est Weight: 450 Lbs

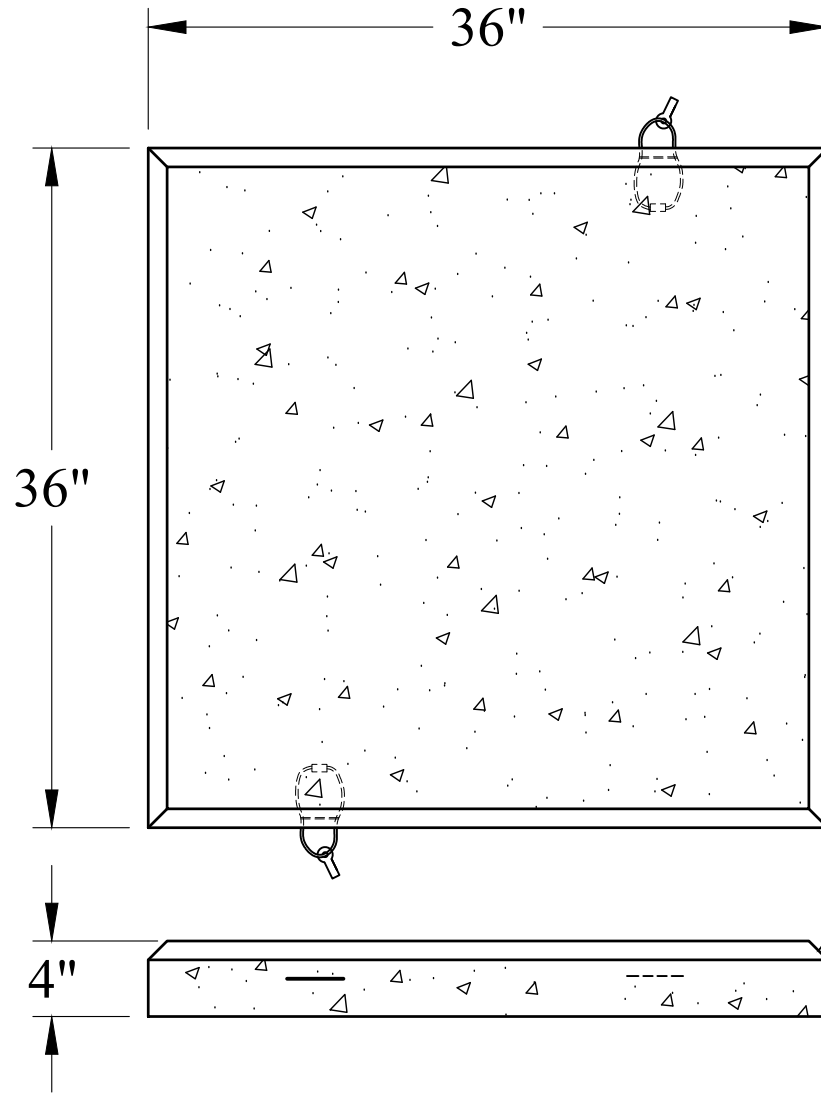

CLA 0.8T



Wire Loop
Lifting Handle Typ
2 Places

1" x 1" Chamfer 4 Top Edges

Phoenix Precast Products

Phoenix Precast Products

Phoenix Precast Products	NH DOT 3' x 3' x 4" Workman's Pad
--------------------------------	---

P/N: NHDOT-3X3X4WP