


General Notes

- 1. Concrete:  $f_c = 5,000$  psi @ 28 Days Minimum
- 2. Reinforcement Conforms to ASTM A 615-Grade 60


Est Weight: 600 Lbs

Phoenix Precast Products

Phoenix Precast Products

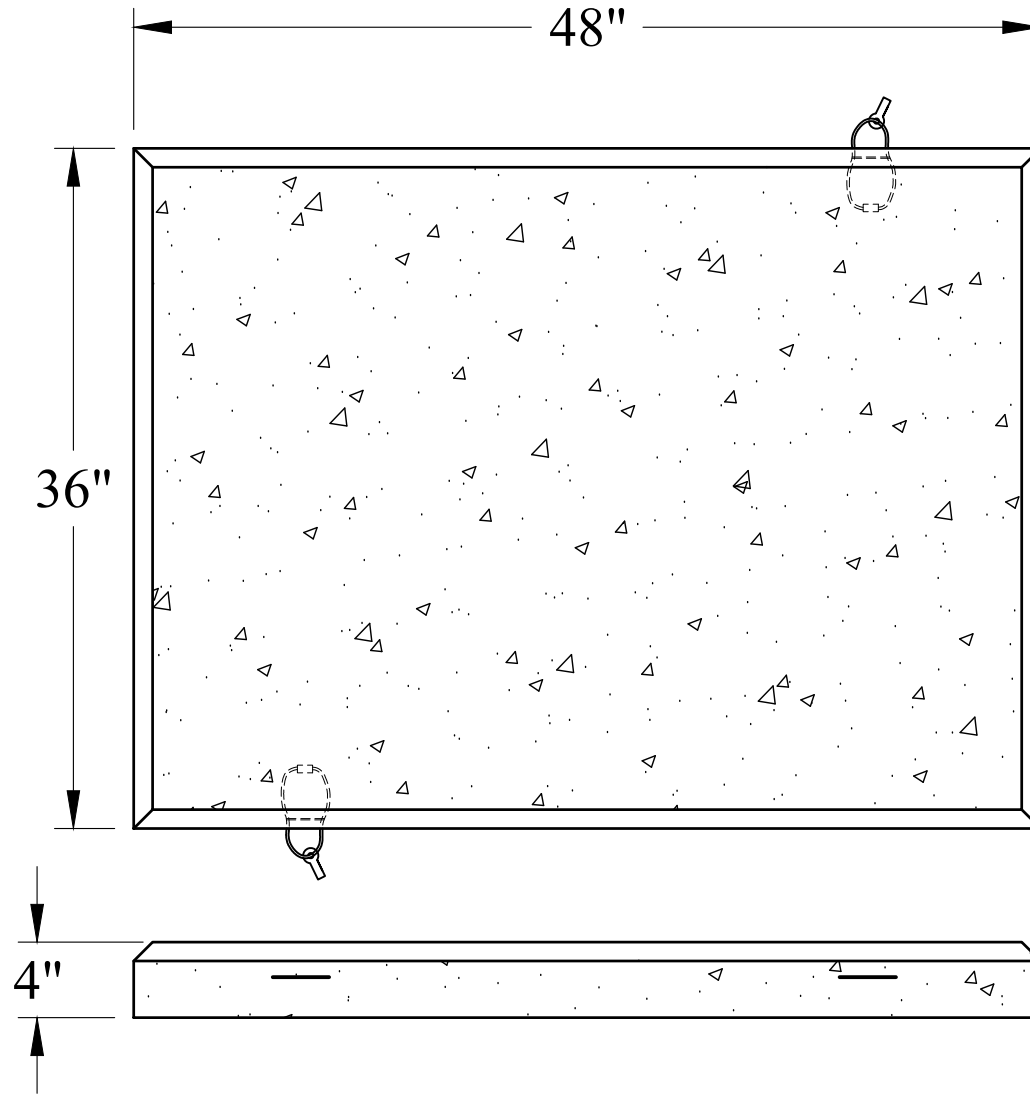

CLA 0.8T

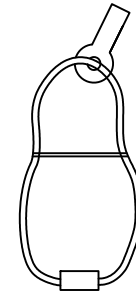

Wire Loop  
Lifting Handle Typ  
2 Places

1" x 1" Chamfer  
4 Top Edges

Phoenix Precast Products	NH DOT 3' x 4' x 4" Workman's Pad
P/N: NHDOT-3X4X4WP	