
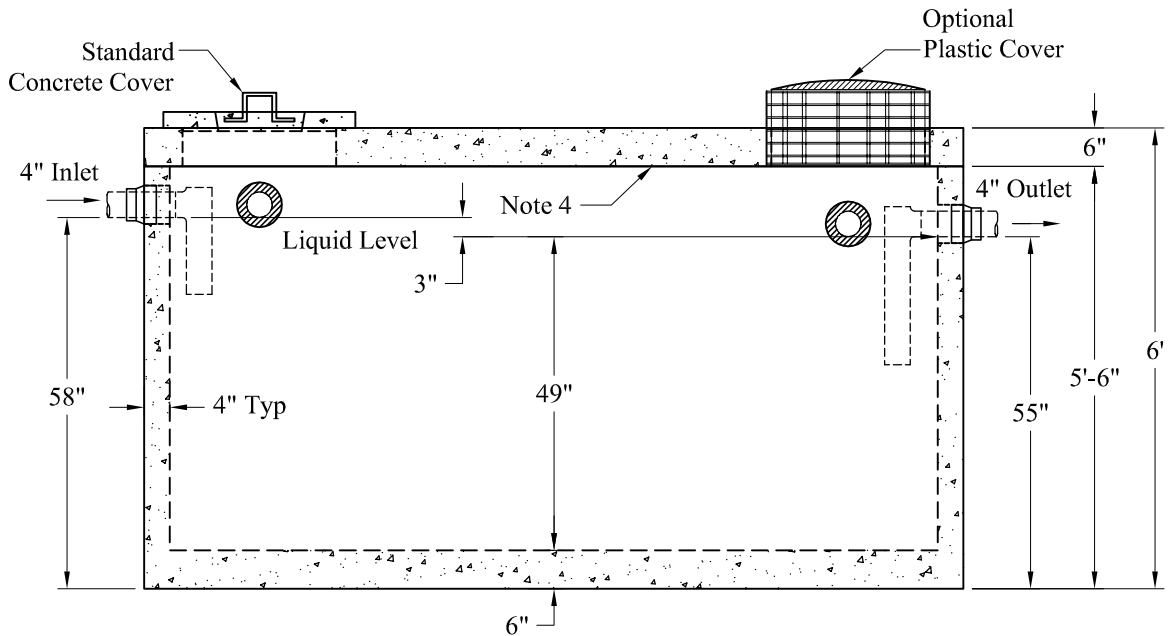


Standard Cover Configuration
Is (2) 24" Dia Concrete Covers

Optional Cover Configuration
Is (2) 24" Dia Plastic Risers
Cast In, With Plastic Covers

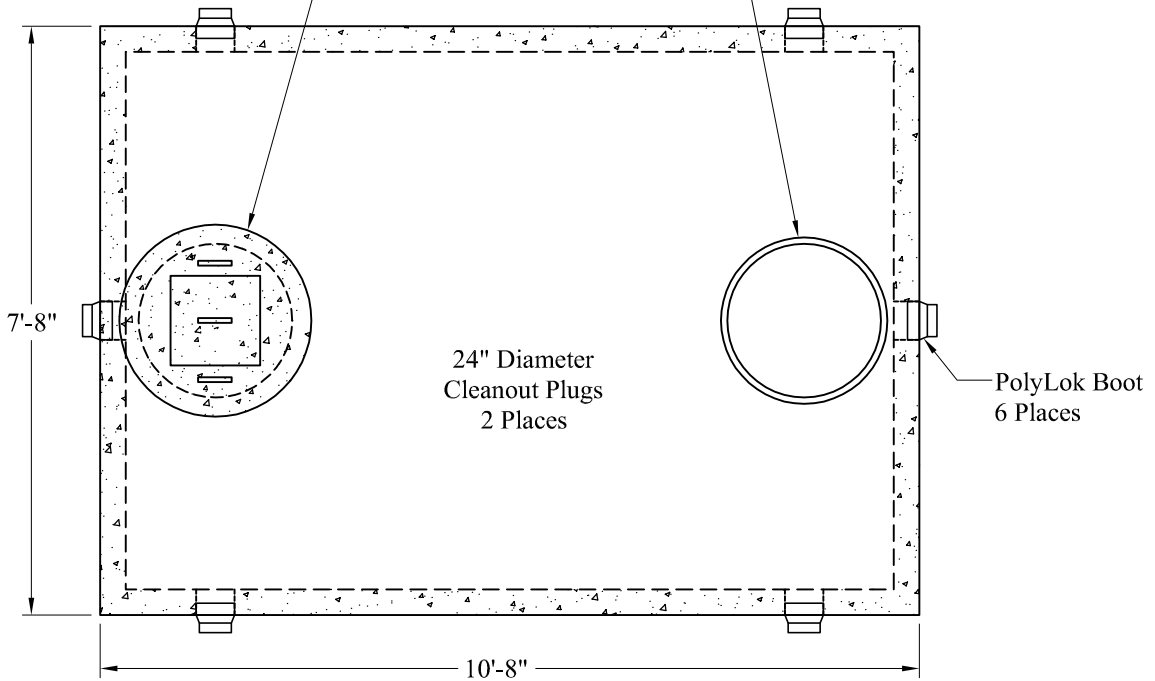

General Notes

1. Steel Reinforcement Conforms to Latest ASTM Specifications: ASTM-A615 Grade 60 Rebar
 2. Concrete: $f_c = 4,000$ psi @ 28 Days Minimum
 3. Flexible Sleeves Used On All Pipe Openings
 4. Butyl Rubber Joint Sealant Provided
 5. Internal PVC Baffles Available
- Inlet: Shall Penetrate at Least 9" Below the Liquid Level, But Not Deeper Than the Outlet Baffle.
- Outlet: Shall Extend Below the Surface of the Liquid Equal to 40% of the Liquid Depth (20").
6. HD Tanks: 3' - 6' Cover Max, Non-Traffic

Weights:
 Top Slab: 5,600 Lbs
 Base: 14,750 Lbs
 Total Weight: 20,350 Lbs

Phoenix
 Precast
 Products

2,000 Gallon
 Top Seam
 HD Septic Tank

P/N: ST-2000MHD