


Lifting Loop

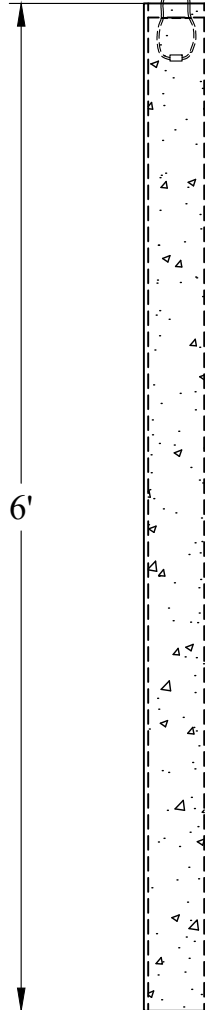

4" Sch 40 Steel Pipe
6'-0" Long
Filled w/ Concrete

6'

General Notes

1. Concrete: $f_c = 4,000$ PSI @ 28 Days Minimum
2. Estimated Weight: 143 Lbs

Phoenix
Precast
Products

Unitil
4" Dia x 6' Tall
T-Pad Bollard

P/N: PB-4BPUNITIL

Concord, NH 03301