



1-800-639-2199

Fax (603) 224-2927

Trunks/Specialty Steel Form/1250 H20 (1250 Gallon H2O Steel Form Tank Sales_Ren0

Phoenix Precast Products

Phoenix Precast Products

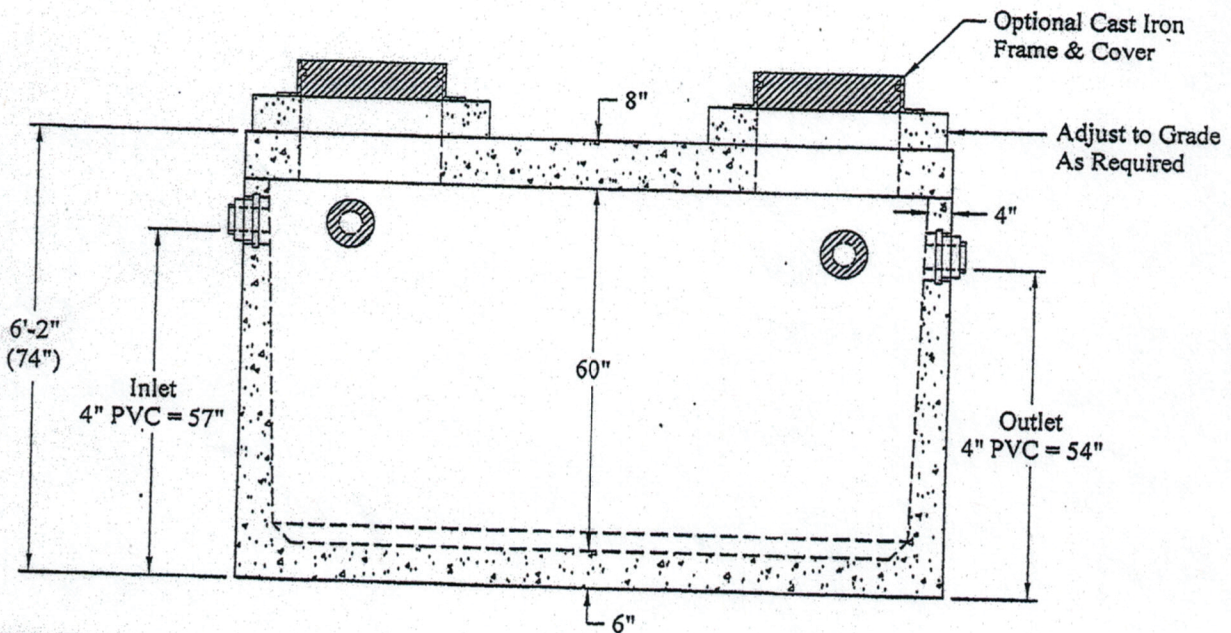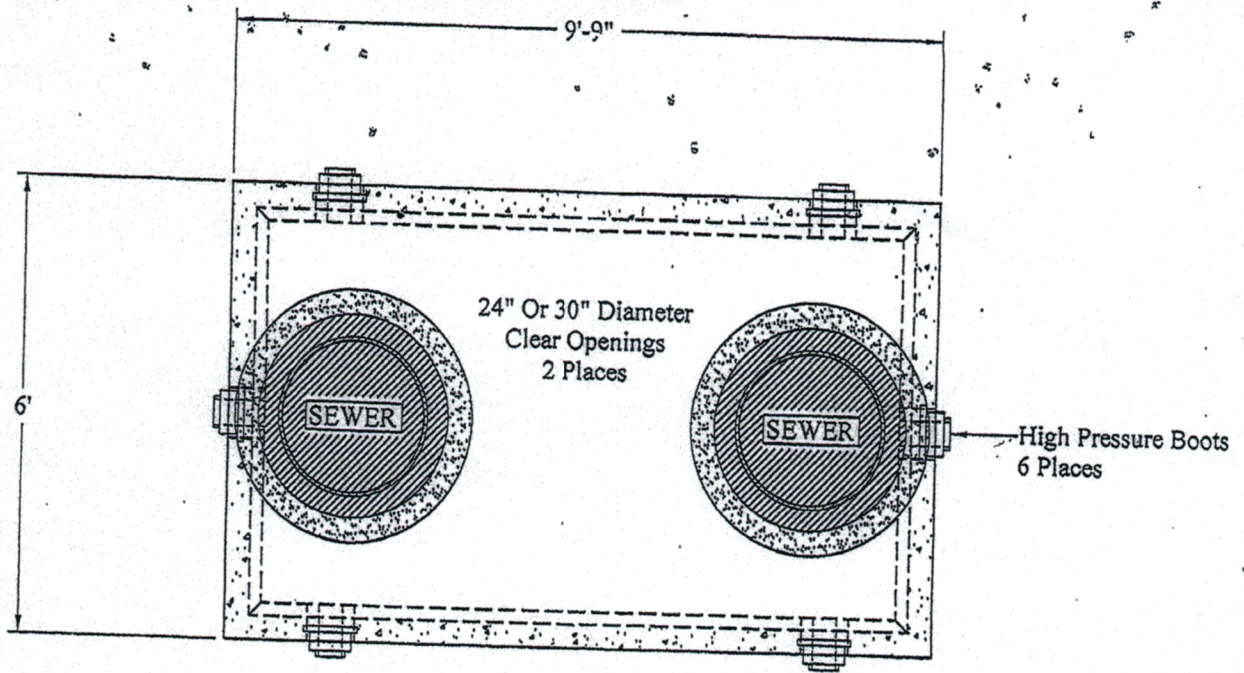

General Notes:

1. Concrete: $f_c = 5,000$ psi @ 28 Days Minimum
2. Steel Reinforcement Conforms to Latest ASTM Specifications: ASTM-A615 Grade 60 Rebar
3. Flexible Sleeves Provided On All Pipe Connections
4. Butyl Rubber Joint Sealant Provided
5. Internal PVC Baffles Available Upon Request
- Inlet: Shall Penetrate at Least 9" Below the Liquid Level, But Not Deeper Than the Outlet Baffle.
- Outlet: Shall Extend Below the Surface of the Liquid Equal to 40% of the Liquid Depth (24").
6. Design Loading: AASHTO-HS20-44, ASTM C-890-06
7. Design Specified As: ASTM C-1227-08, ASTM C-913-08
8. Other Inlet/Outlet Pipe Sizes Available

Est. Weight:

Top Slab: 5,150 Lbs.
Base: 13,550 Lbs
Total: 18,700 Lbs

Liquid Levels: 5'-1" x 8'-11" = 339.8 Gals/VF
4" PVC = 1,359 Gals Inverts: Inlet-51" Outlet-48"

Phoenix
Precast
Products

1,250 Gallon
H2O Tank

P/N: ST-1250H20

77 Regional Drive

Concord NH 03301