
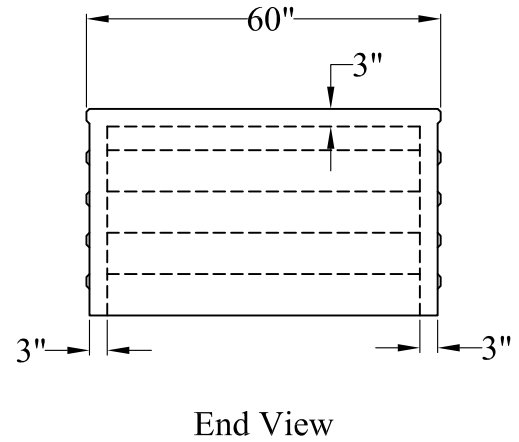
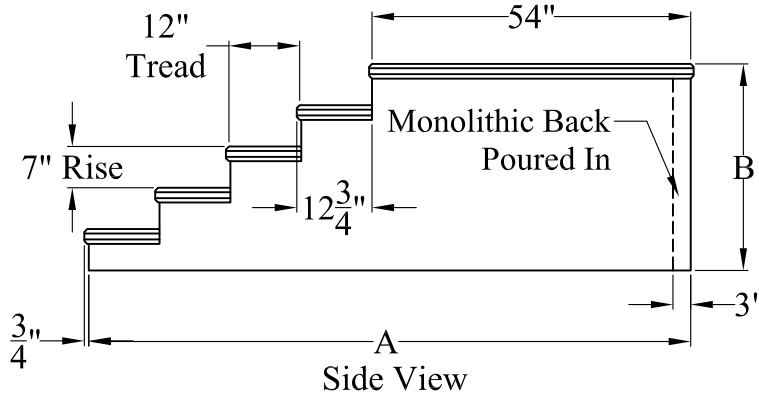


Bolt-On Wrought Iron Railings Available  
For Left or Right Hand Entry

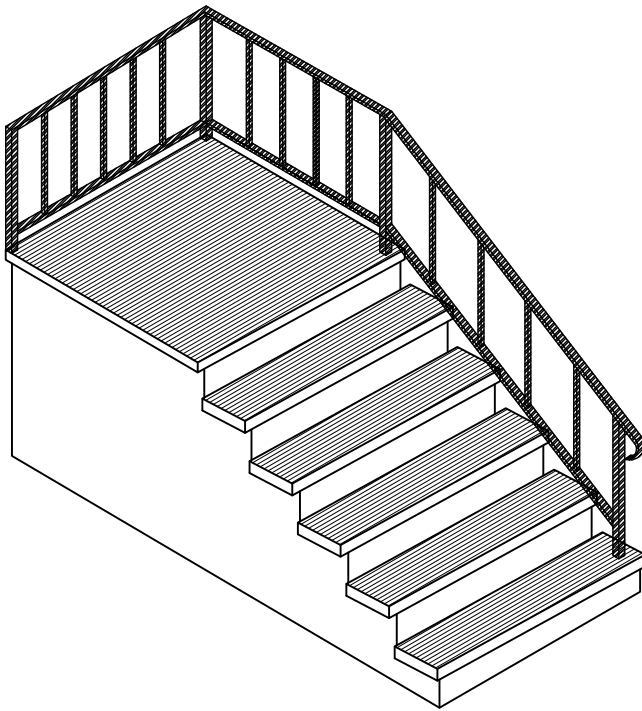

| Riser | Length A | Height B | P/N        | Est. Weight |
|-------|----------|----------|------------|-------------|
| 1     | 54"      | 7"       | PSSE-PLT   | 850         |
| 2     | 66"      | 14"      | PSSE-5WX2R | 1,300       |
| 3     | 78"      | 21"      | PSSE-5WX3R | 1,800       |
| 4     | 90"      | 28"      | PSSE-5WX4R | 2,300       |
| 5     | 102"     | 35"      | PSSE-5WX5R | 2,800       |
| 6     | 114"     | 42"      | PSSE-5WX6R | 3,300       |

**General Notes:**

1. Concrete 4,000 psi Minimum After 28 Days
2. Broom Finish Applied to Treads & Platform
3. Wrought Iron Rails Available

Phoenix  
Precast  
Products

Precast Side Entry  
Steps

P/N: See Above

Concord, NH 03301