


Recessed Lift Handles
in Top Slab Typ

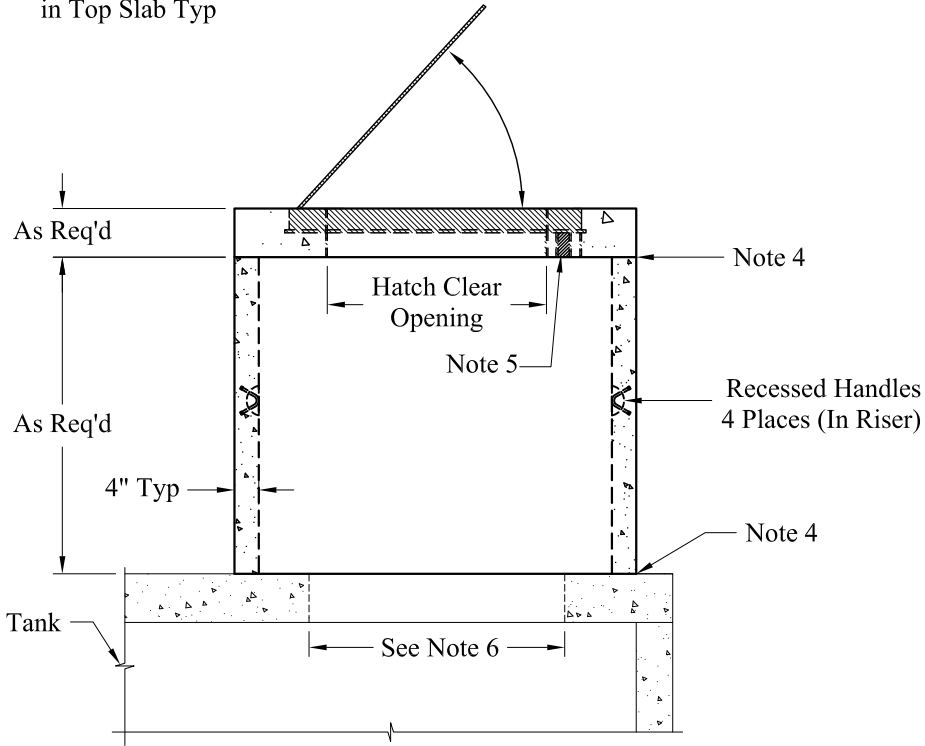

General Notes

1. Concrete: $f_c = 5,000$ psi @ 28 Days Minimum (Fiber in Top Slab Only)
2. Reinforcing Steel: ASTM-A615 Grade #60
3. Hatch Per Contract Specification Cast In
4. Butyl Rubber Joint Sealant Provided
5. Hatch to Drain Inside Structure Unless Designated Otherwise
6. Opening in Top Slab is Hatch Clear Opening Plus 6" Each Way

Phoenix
Precast
Products

Light Duty Hatch
With Concrete Riser

P/N: Custom As Required

Concord, NH 03301