




Detail 1
Precast Headwall Details

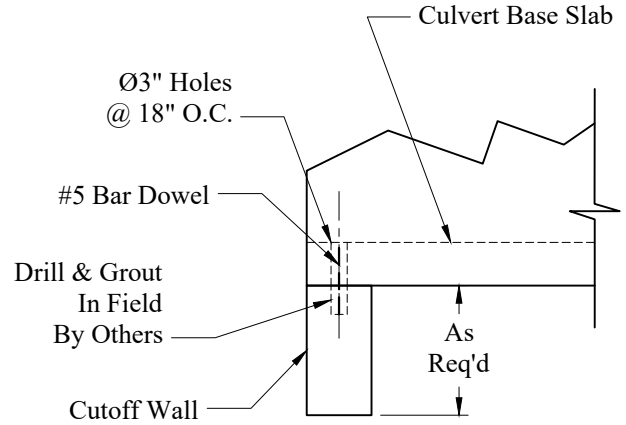

Detail 2
Precast Cutoff Wall Details

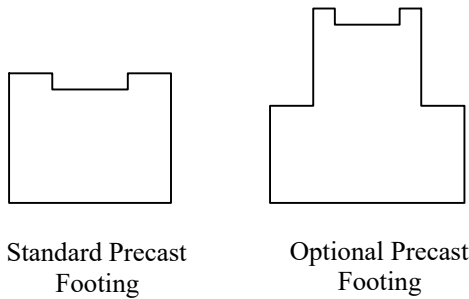

Detail 3
Footing Details

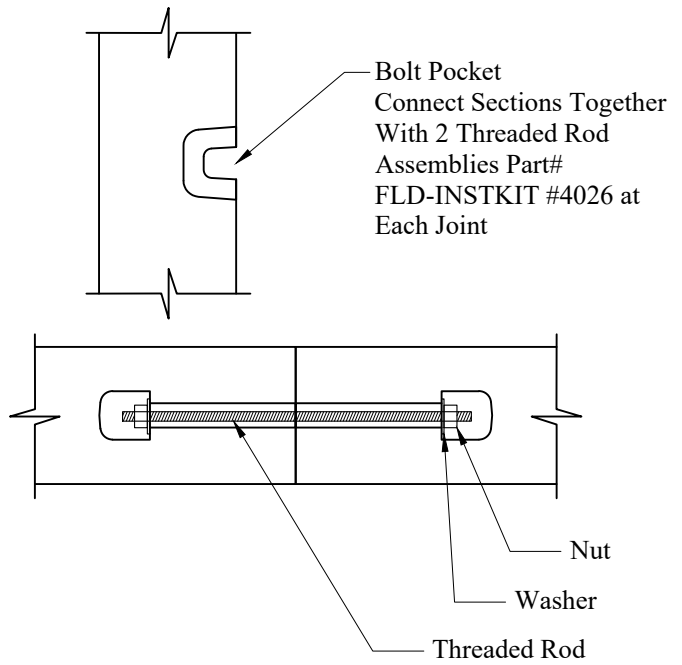

Detail 4
Bolt Pocket Details

General Notes

1. Concrete: $f_c = 5,000$ psi @ 28 Days Minimum, Type III Cement
2. Steel Reinforcing Conforms to Latest ASTM Specifications
ASTM A-615 Grade 60 Rebar
3. Designed per Latest ASTM Specification C-1433
4. Design Loading:
Live Load : Per Job Specifications
Dead Load : Per Job Specifications
5. Butyl Rubber Joint Sealant Conforms to ASTM C-990
and Federal Spec SS-S-210A

Phoenix
Precast
Products

Box Culvert
Standard Details

P/N: None

Concord, NH 03301