




Side View

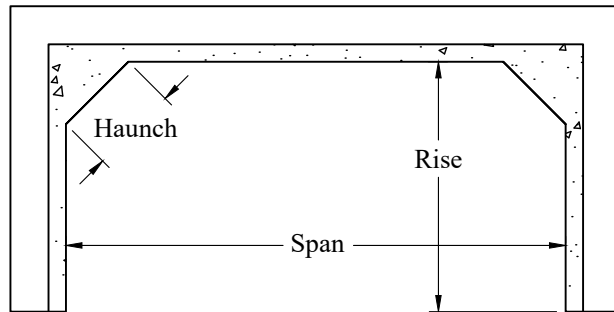

End View

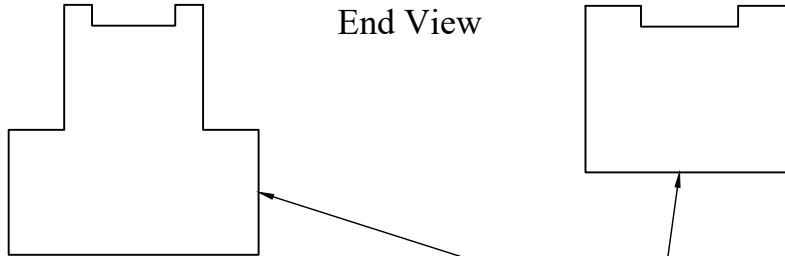

Typ Footings

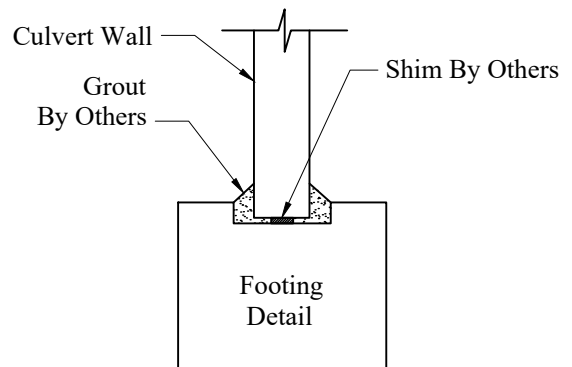

**General Notes**

1. Concrete:  $f_c = 5,000$  psi @ 28 Days Minimum, Type III Cement
2. Steel Reinforcing Conforms to Latest ASTM Specifications  
ASTM A-615 Grade 60 Rebar
3. Designed per Latest ASTM Specification C-1433
4. Design Loading:  
Live Load : Per Job Specifications  
Dead Load : Per Job Specifications
5. Butyl Rubber Joint Sealant Conforms to ASTM C-990 and  
Federal Spec SS-S-210A

**Phoenix  
Precast  
Products**

**Typical  
3-Sided Box Culvert  
(Without Or Separate)  
Footings**

**P/N: Custom As Required**

**Concord, NH 03301**

**77 Regional Drive**