


Side View

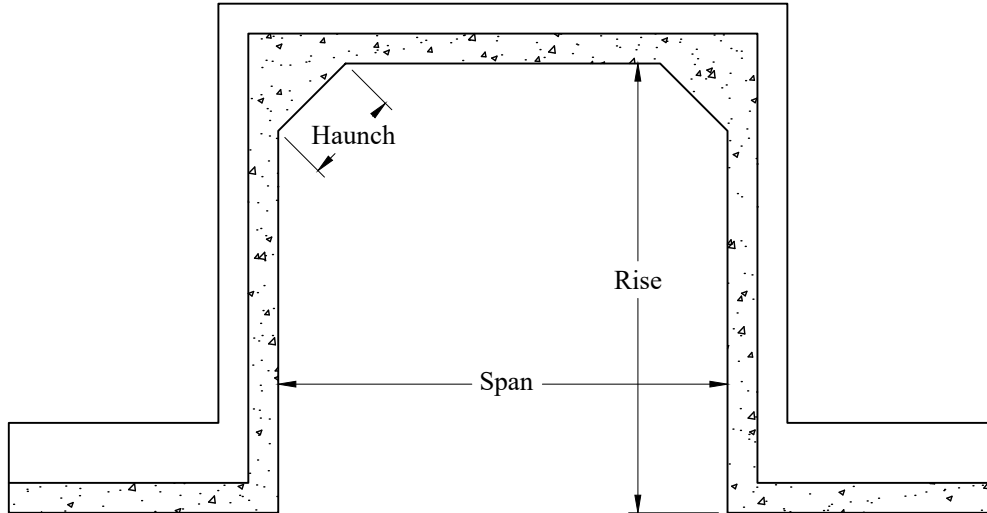

End View

General Notes

1. Concrete:  $f_c = 5,000$  psi @ 28 Days Minimum, Type III Cement
2. Steel Reinforcing Conforms to Latest ASTM Specifications  
ASTM A-615 Grade 60 Rebar
3. Designed per Latest ASTM Specification C-1433
4. Design Loading:  
Live Load : Per Job Specifications  
Dead Load : Per Job Specifications
5. Butyl Rubber Joint Sealant Conforms to ASTM C-990 and  
Federal Spec SS-S-210A

Phoenix  
Precast  
Products

Typical  
3-Sided Box Culvert  
With Footings

P/N: Custom As Required

Concord, NH 03301

77 Regional Drive