



C:\Users\trouille\OneDrive - Sabbow & Co Inc\ray r Web Site 2024\Septic_Tanks\2
Compartment LD Mid-Seam\Large_LD_2 Comp_2000-600_Tank_Rev8.dwg

Phoenix Precast Products

Phoenix Precast Products

Standard Cover Configuration
(3) 24" Dia Concrete Covers

Optional Cover Configuration
(3) 24" Dia Plastic Risers
Cast In, With Plastic Covers

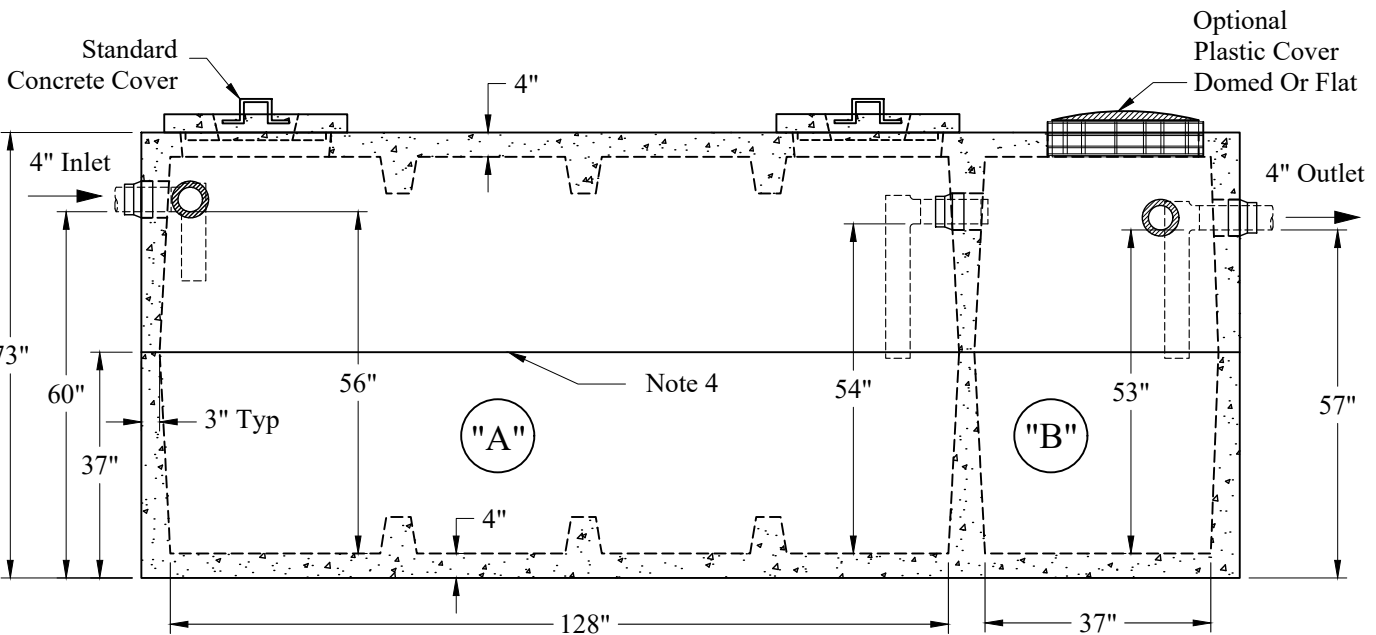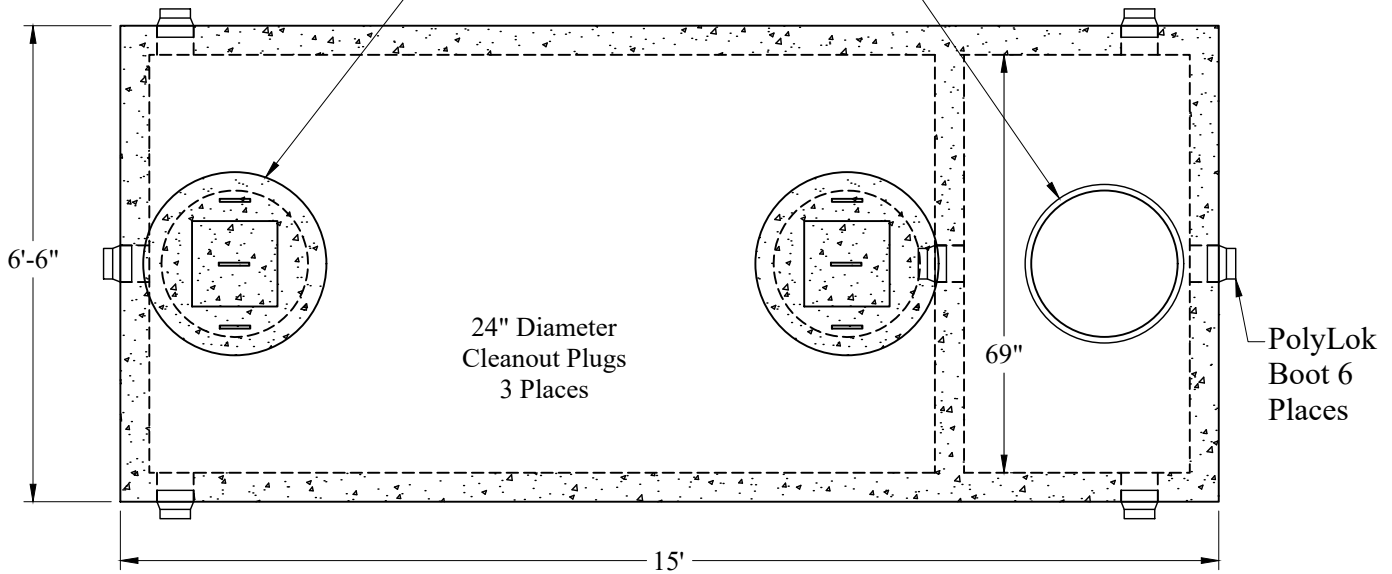

General Notes

1. Steel Reinforcement Conforms to Latest ASTM Specifications: ASTM-A615 Grade 60 Rebar
 2. Concrete: $f_c = 4,000$ psi @ 28 Days Minimum
 3. Flexible Sleeves Used On All Pipe Openings
 4. Butyl Rubber Joint Sealant Provided
 5. Internal PVC Baffles Available
- Inlet:**
Shall Penetrate at Least 9" Below the Liquid Level But Not Deeper Than the Outlet Baffle.
- Outlet:**
Shall Extend Below the Surface of the Liquid Equal to 40% of the Liquid Depth (21").
6. LD Tanks: 3' Cover Max, Non-Traffic

"A" Liquid Level = 473 Gals/VF (39 Gals/In)
 "B" Liquid Level = 143 Gals/VF (12 Gals/In)
 "A" = 2,106 Gals
 "B" = 636 Gals
 Total = 2,742 Gals

Est Weight:
 Top: 11,780 Lbs
 Base: 11,790 Lbs
 Total: 23,570 Lbs

Phoenix Precast Products	2000/600 Gallon LD 2 Compartment Tank
	P/N: ST-2000/600LD P/N: ST-2000/600PLSLD

P/N: ST-2000/600LD
P/N: ST-2000/600PLSLD