603-225-5169 / info@phoenixprecast.com

C:\Users\rrouille\OneDrive - Sabbow & Co Inc\ray r Web Site 2024\Septic_Tanks\2 Compartment HD Mid-Seam\Med_HD_2 Comp_1600-450_Tank_Rev4.dwg

Phoenix Precast Products

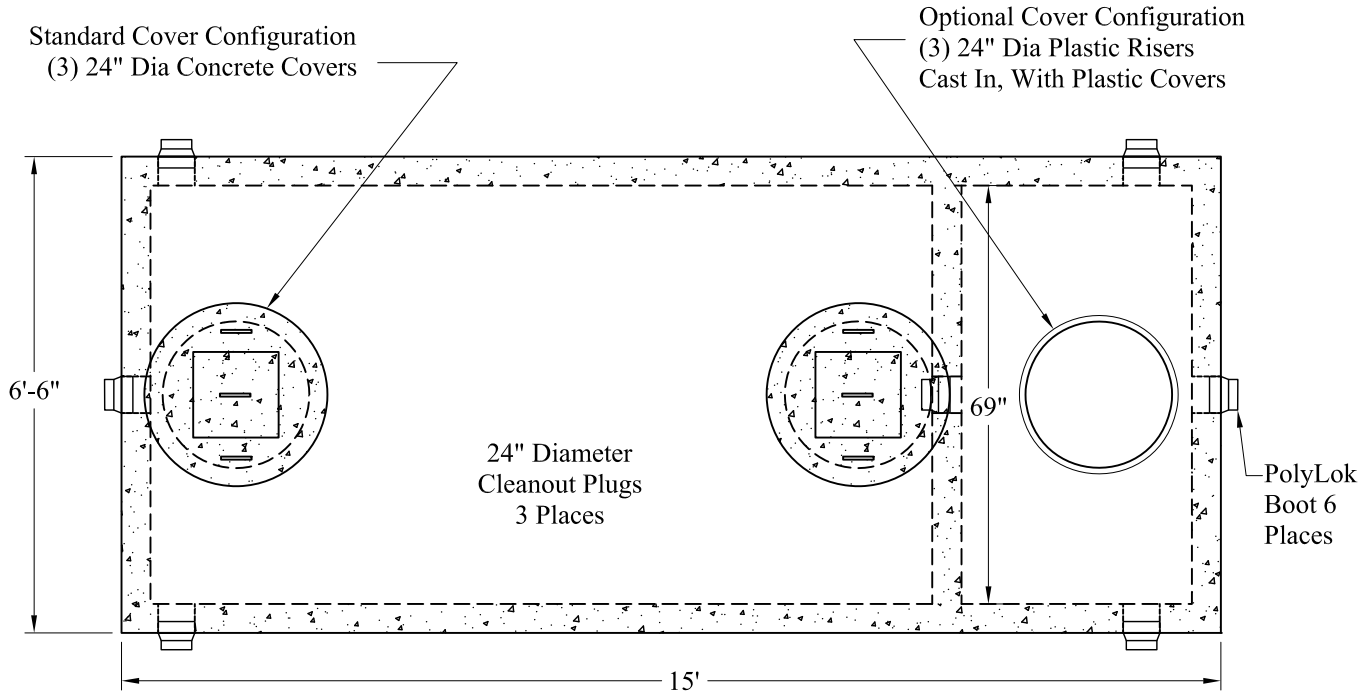

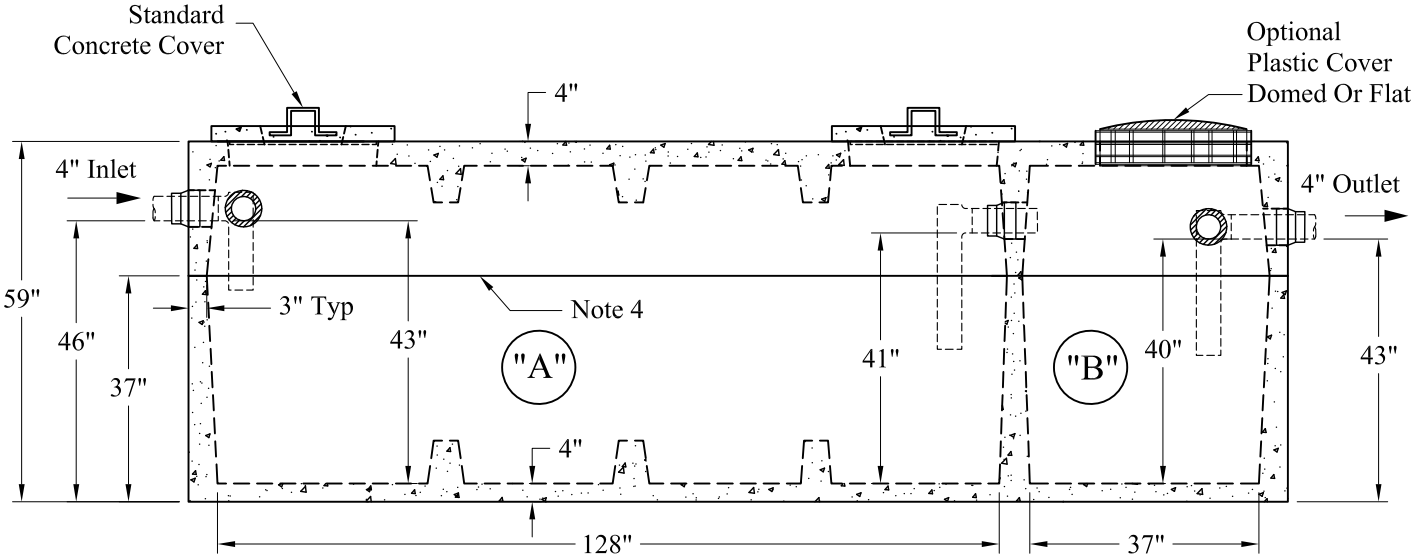

General Notes

1. Steel Reinforcement Conforms to Latest ASTM Specifications: ASTM-A615 Grade 60 Rebar
2. Concrete: fc = 4,000 psi @ 28 Days Minimum
3. Flexible Sleeves Used On All Pipe Openings
4. Butyl Rubber Joint Sealant Provided
5. Internal PVC Baffles Available
   Inlet:
   Shall Penetrate at Least 9" Below the Liquid Level But Not Deeper Than the Outlet Baffle.
   Outlet:
   Shall Extend Below the Surface of the Liquid Equal to 40% of the Liquid Depth (17").
6. HD Tanks: 3' - 6' Cover Max, Non-Traffic

"A" Liquid Level = 473 Gals/VF (39 Gals/In)
"B" Liquid Level = 143 Gals/VF (12 Gals/In)
"A" = 1,599 Gals
"B" = 480 Gals
Total = 2,079 Gals

Est Weight:
Top: 9,440 Lbs
Base: 11,790 Lbs
Total: 21,230 Lbs

Phoenix Precast Products	1,600 / 450 Gallon HD 2 Compartment Tank
P/N: ST-1600/450HD P/N: ST-1600/450PLSHD	

Phoenix Precast Products

25Nov24 RR

77 Regional Drive Concord, NH 03301