


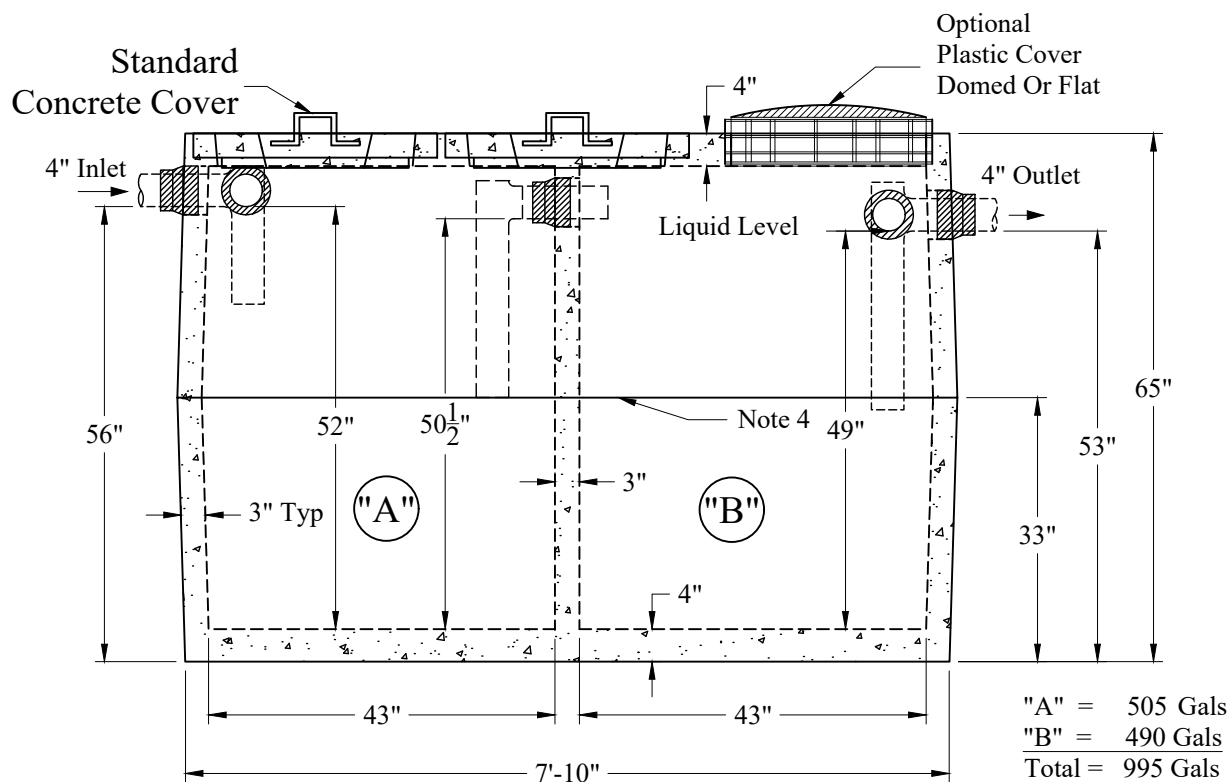

"A" =	505 Gals
"B" =	490 Gals
Total =	<u>995 Gals</u>

Est Weight:

(Std Cover)	P/N: MST-500/500TOPHD	Top: 4,400 Lbs
(Plastic Cover)	P/N: MST-WW500/500HDtop:	Top 4,400 Lbs
	P/N: MST-500/500BOTHD:	Bottom 4,400 Lbs
		Total Reg or Plastic: 8,800 Lbs

General Notes

1. Steel Reinforcement Conforms to Latest ASTM Specifications: ASTM-A615 Grade 60 Rebar
2. Concrete: $f_c = 4,000$ psi @ 28 Days Minimum
3. Flexible Sleeves Used On All Pipe Openings
4. Butyl Rubber Joint Sealant Provided
5. Internal PVC Baffles Available
 - Inlet: Shall Penetrate at Least 9" Below the Liquid Level But Not Deeper Than the Outlet Baffle.
 - Outlet: Shall Extend Below the Surface of the Liquid Equal to 40% of the Liquid Depth (20").
6. HD Tanks: 3'-6' Cover Max, Non-Traffic

Phoenix Precast Products

500/500 Gallon HD 2 Compartment Tank

P/N: ST-500/500HD
P/N: ST-500/500PLSHD

27Nov24 RR

77 Regional Drive

Concord, NH 03301