


P/N	60" Platform	
	"A"	Est. Wgt Lbs
PSSE-5W60PLT	60"	1,077
PSSE-5WX2R60PLT	72"	1,624
PSSE-5WX3R60PLT	84"	2,214
PSSE-5WX4R60PLT	96"	2,818
PSSE-5WX5R60PLT	108"	3,527
PSSE-5WX6R60PLT	120"	4,244

P/N	54" Platform	
	"A"	Est. Wgt Lbs
PSSE-5W54PLT	54"	978
PSSE-5WX2R54PLT	66"	1,504
PSSE-5WX3R54PLT	78"	2,072
PSSE-5WX4R54PLT	90"	2,655
PSSE-5WX5R54PLT	102"	3,342
PSSE-5WX6R54PLT	114"	4,037



P/N	36" Platform	
	"A"	Est. Wgt Lbs
PSSE-5W36PLT	36"	683
PSSE-5WX2R36PLT	48"	1,144
PSSE-5WX3R36PLT	60"	1,648
PSSE-5WX4R36PLT	72"	2,166
PSSE-5WX5R36PLT	84"	2,787
PSSE-5WX6R36PLT	96"	3,418

P/N	24" Platform	
	"A"	Est. Wgt Lbs
PSSE-5W24PLT	24"	486
PSSE-5WX2R24PLT	36"	904
PSSE-5WX3R24PLT	48"	1,365
PSSE-5WX4R24PLT	60"	1,840
PSSE-5WX5R24PLT	72"	2,417
PSSE-5WX6R24PLT	84"	3,005

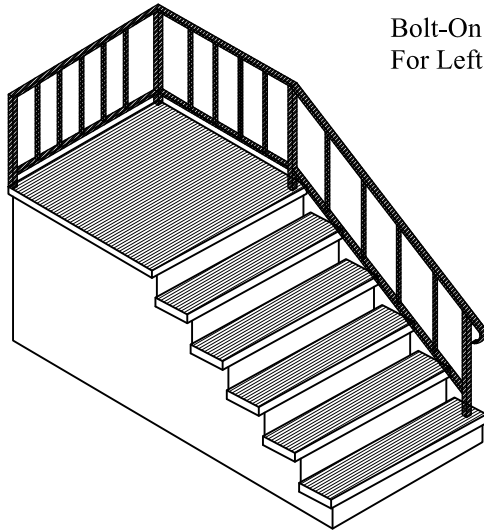

Bolt-On Wrought Iron Railings Available
For Left or Right Hand Entry

Riser	Height B
1	7"
2	14"
3	21"
4	28"
5	35"
6	42"

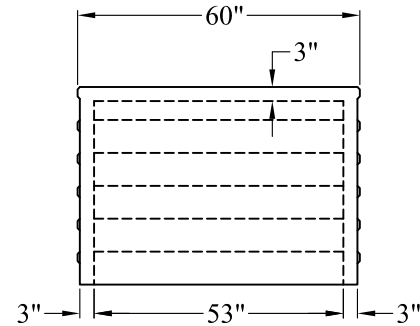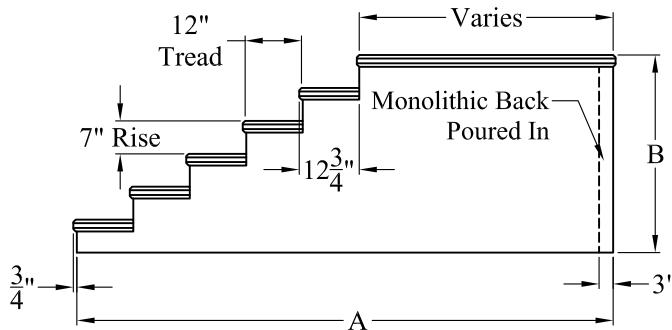

General Notes:

1. Concrete 4,000 psi Minimum After 28 Days
2. Broom Finish Applied to Treads & Platform
3. Wrought Iron Rails Available

Phoenix
Precast
Products

5' Wide
Side Entry Steps

P/N: See Above